

## Recommendations for Aerosol Applications of Silicone-Based Materials

September 2001  
Revised March 2018

This document provides information and recommendations relevant to formulating aerosol products containing silicone-based materials and explains the impact of aerodynamic particle size in aerosol product applications containing these silicone-based materials (ISO, 1995). Silicone-based materials may be safely used in industrial spray applications where exposure to aerosols can be minimized through appropriate industrial hygiene practices including engineering controls and use of personal protective equipment. The considerations and recommendations set forth in this document should be followed for aerosol applications, such as consumer spray applications, in which industrial hygiene practices are not available. It is recommended that if a silicone-based material or emulsion is being developed for an aerosol application, the developer should pay particular attention to the aerodynamic particle size distribution (MMAD) that will be generated and consider the potential for enhanced toxicity resulting from the presence of other components in the aerosol formulation.

### General Recommendations

When considering a consumer aerosol application using any silicone-based material, regardless of the method of aerosol generation, the aerodynamic particle size distribution (expressed as the Mass Median Aerodynamic Diameter; MMAD) should be 30  $\mu\text{m}$  or greater with no more than 1% of the particle mass having an aerodynamic diameter of 10  $\mu\text{m}$  or less. By following this recommendation, virtually all aerosol particles will be deposited in the nasopharyngeal region with substantially less deposited in the tracheobronchial (conducting airways) or alveolar (gas exchange) regions. If an aerosol application results in a particle size distribution with more than 1% of the aerosol mass with a MMAD of 10  $\mu\text{m}$ , or less, further evaluation of the inhalation toxicity potential (*e.g.* acute inhalation toxicity test) should be considered.

### **Potential Effects**

The physical properties of an oil or fat aerosol may lead to a number of potentially serious health effects following inhalation exposure. Chemical pneumonitis, lipoid pneumonia, and petroleum distillate pneumonitis are all terms that describe pulmonary (deep lung) tissue damage, edema, fibrosis, or other inflammatory changes in the lungs. These changes can be induced by inhalation of an oil or fat aerosol such as a silicone-based material into the alveolar region of the lung. Regional release of endogenous lipid (fatty) or oil within the lung, as occurs in certain disease

states, also can produce a pneumonitis reaction. Ostensibly, this damage is not due to a specific mechanism of chemical toxicity but rather is driven by a physical disturbance of the alveolar lining and subsequent attempts by inflammatory cells within the lung to resolve the lesion.

### **Considerations**

Physical characteristics, such as surface tension/activity and spreadability, contribute to the similarity between silicone-based materials and other oils or fats, and the potential for pulmonary effects for aerosols of MMAD <30  $\mu\text{m}$ . Silicone-based materials have a wide variety of uses including applications for consumer use. It is recommended that if a silicone-based material is being developed for an aerosol application, the developer should pay particular attention to the aerodynamic particle size distribution (MMAD) that will be generated and also consider the potential for respiratory effects resulting from the presence of other components in the aerosol formulation.

## APPENDIX


### What Are Aerosols?

Aerosols are often described as multiphase systems of solid (fumes or dusts) or liquid (mists) particulates suspended in air or other gases (Rothe, *et al.* 2011). The particles remain suspended because they are small and, therefore, do not fall (or sediment) rapidly under the force (or pull) of gravity. Many chemicals can be inhaled as aerosols. Just as liquid and solid aerosol particles can sediment in air, they can also be deposited in the upper and lower respiratory tract, if inhaled. The aerodynamic diameter of a particle determines the location and efficiency of deposition within the upper and lower respiratory tract (Fig. 1). Any aerosol can be described based on its particle size distribution and penetration of these particles in the various regions of the respiratory tract (Nieboer *et al.* 2005). The Inhalable Aerosol Fraction is that fraction of aerosol particles that can enter the body through the nose and/or mouth during breathing. This fraction corresponds to particles with aerodynamic diameter ( $d_{ae}$ )  $\leq 100 \mu\text{m}$ . This aerosol fraction may be relevant to health effects anywhere in the respiratory tract. The Thoracic Aerosol Fraction ( $d_{ae} < 30 \mu\text{m}$ ) is a sub-fraction of the Inhalable Fraction composed of particles that can penetrate into the tracheo-bronchial/alveolar region of the lung. The Respirable Aerosol Fraction (or alveolar fraction) is the sub-fraction of inhaled particles ( $d_{ae} < 10 \mu\text{m}$ ) that penetrates into the alveolar (gas exchange) region of the lung.

The regional deposition, clearance, and absorption of aerosols in the respiratory tract depend on many factors including solubility, reactivity, and aerodynamic diameter (MMAD). (Rothe, *et al.*, 2011, Bakand, *et al.*, 2005, WHO, 1999). The aerodynamic diameter of an aerosol particle is defined as the diameter of a hypothetical, smooth sphere of unit density ( $1 \text{ g/cm}^3$ ) that has the same gravitational settling velocity as the droplet in calm air, regardless of its actual geometric size, shape and density (WHO, 1999, Phalen and Oldem, 2006). The following are just a few references that can be consulted for information on methods for determining the particle size distribution for an aerosol: Vincent, 1995; Hinds, 1982; FEA European Aerosol Federation, 2009; Kulkarni and Willeke, 2011.

Brown *et al.* (2013) have determined the size of respirable particle fractions for both adults and children. They estimated the fraction of inhaled particles penetrating beyond the larynx ( $0.5\text{-}20 \mu\text{m}$  aerodynamic diameter, based on experimental data) and ciliated airways (based on a mathematical model) for an adult male, adult female, and a 10-year old child during typical daily activities and breathing patterns and found that the aerodynamic diameter needed to be  $<3 \mu\text{m}$  for adults and  $<5 \mu\text{m}$  for children in order to pass beyond the larynx. Similarly, the US National Institutes of Environmental Health Sciences, citing Johnson and Vincent (2003), has stated, “Particles in the size of range of  $10$  to  $100 \mu\text{m}$  are unable to make the turns and impact on the nasal hairs, nasal mucosa, or mucus-covered ciliated epithelium in the bronchi and bronchioles. Soluble particles simply dissolve, while insoluble particles are transported up the conducting airways by the ciliated epithelium and swallowed or expectorated.” The Cosmetic Ingredient Review Precedent on Aerosols (2012) concludes the same in that “there is broad scientific consensus that the probability of penetration of droplets/particles with  $d_{ae} > 10 \mu\text{m}$  into the alveolar region is essentially zero.”

**Figure 1. Impact of aerodynamic particle size on regional deposition in humans**

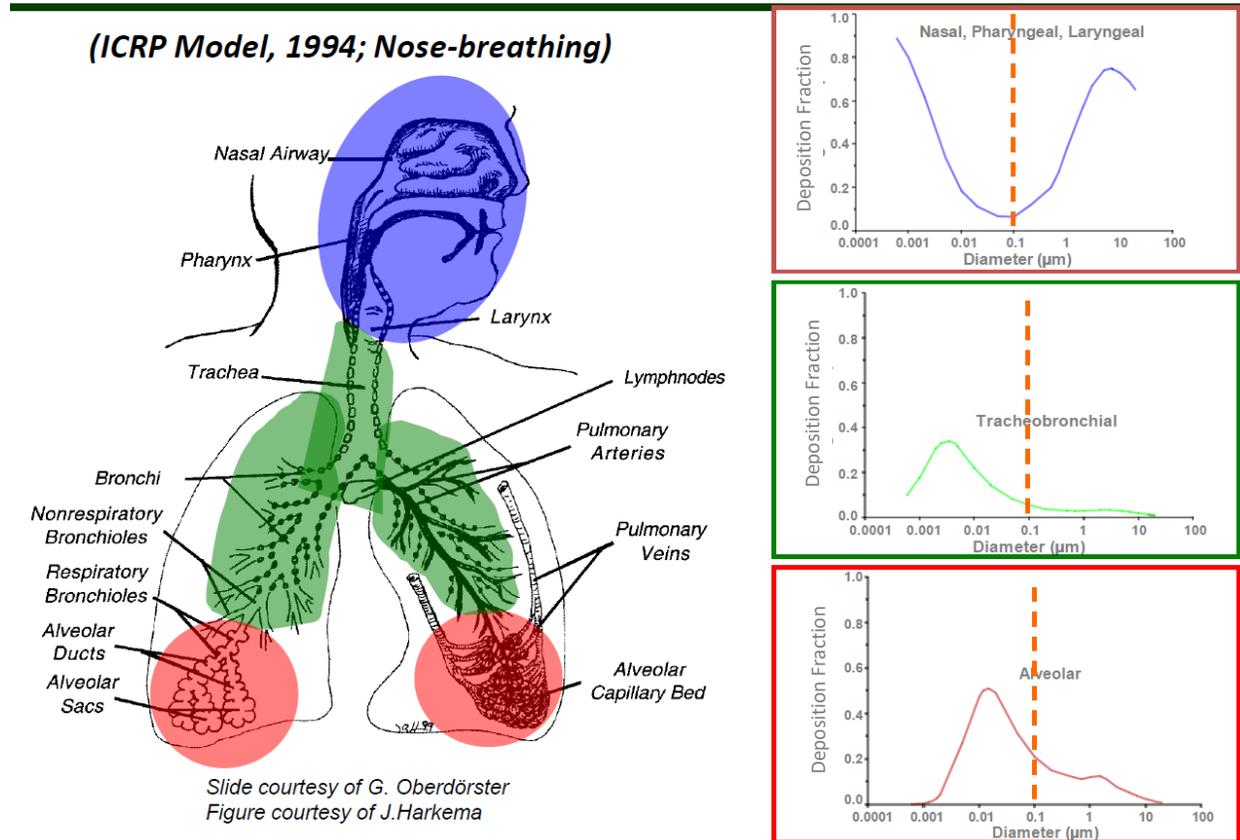

## References

Bakand, S, Winder C, Khalil C, and Hayes A. 12-1-2005. Toxicity assessment of industrial chemicals and airborne contaminants: transition from in vivo to in vitro test methods: a review. *Inhal.Toxicol.* 17(13):775-787.

Brown, J.S., Gordon, T., Price, O., Asgharian, B. (2013). Thoracic and respirable particle definitions for human health risk assessment. *Particle and Fibre Toxicology*, 10:12.

Cosmetic Ingredient Review - Precedents, Aerosols. 9/2012.  
[http://www.cir-safety.org/sites/default/files/aeroso092012rep\\_0.pdf](http://www.cir-safety.org/sites/default/files/aeroso092012rep_0.pdf)

FEA European Aerosol Federation. 2009. Guide on Particle Size Measurement from Aerosol Products.

Hinds, William C. 1982. *Aerosol Technology*. New York: John Wiley and Sons.

International Commission on Radiological Protection (ICRP). 1994. *Human Respiratory Tract Model for Radiological Protection*, International Commission on Radiological Protection Publication 66, Pergamon Press, New York.

International Organization for Standardization (ISO): Air Quality – Particle Size Fraction Definitions for Health-Health Related Sampling, ISO 7708:1995. ISO, Geneva (1995)

Johnson, D., & Vincent, J. (2003). Sampling and Sizing of Airborne Particles. In *The occupational Environment: Its Evaluation, Control and Management*, by Salvatore R DiNardi, 202-223. Virginia: American Industrial Hygiene Association

Kulkarni, P. Baron, PA, Willeke, K., 2011. *Aerosol Measurement: Principles, Techniques, and Applications, 3<sup>rd</sup> Edition*. Wiley

Nieboer, E., Thomassen, Y., Chashchin, V., Odland, J.O. 2005. Occupational exposure assessment of metals. *JEM* 7: 411-415. Phalen, RF and Oldham MJ. Aerosol dosimetry considerations. *Clin Occup Environ Med*. 2006;5(4):773-784.

Rothe, H, Fautz R, Gerber E, Neumann L, Rettinger K, Schuh W, and Gronewold C. 8-28-2011. Special aspects of cosmetic spray safety evaluations: Principles on inhalation risk assessment. *Toxicol Lett*. 205(2):97-104.

Vincent, James, H. 1995. *Aerosol Science for Industrial Hygienists*. New York: Elsevier Science.

World Health Organization (WHO). 1999. Hazard Prevention and Control in the Work Environment: Airborne Dust. Geneva, Switzerland. Report No. WHO/SDE/OEH/99.14. pp. 1-246.

#### **Disclaimer**

SEHSC, representing silicone chemical manufacturers in North America, has prepared this document for use by their members when dealing with current and potential customers and distributors of silicone chemicals. This document assumes a basic knowledge of silicone chemistry, products, and toxicology and has not been prepared for use by the general public. SEHSC makes no express or implied warranties as to the accuracy of this document and have no responsibility to amend or revise this document. No person should rely on this document as a primary reference, but rather should consult published materials, relevant MSDSs, and/or the appropriate individuals within a silicone manufacturing company for further information.